

- web.xml
  - JSP
  - Yellowfin
- 
- - Web
  - Yellowfin
  - JavaJVM
    - Windows
    - Windows
    - Linux/Unix/Mac OSX

web.xml

web.xmlYellowfin Yellowfinweb.xml

Yellowfin\appserver\webapps\ROOT\WEB-INF

Yellowfin web.xmlYellowfin

JSP

```
<ENTITY>YellowfinURL
<!ENTITY jsps SYSTEM "file:/C:/Program Files/Yellowfin/appserver/webapps/ROOT/WEB-INF/web-jsps.xml">

<!ENTITY jsps SYSTEM "file:/usr/Yellowfin/appserver/webapps/ROOT/WEB-INF/web-jsps.xml">
```

Yellowfinweb.xmlYellowfin **InitConnectionPool<servlet>**

|                       |                        |       |
|-----------------------|------------------------|-------|
| JDBCDriverClass       | JDBC                   |       |
| JDBCUrl               | JDBC URL               |       |
| JDBCUser              |                        |       |
| JDBCPassword          |                        |       |
| JDBCPasswordEncrypted | JDBCPasswordtrue/false | false |
| JDBCMinCount          |                        |       |
| JDBCMaxCount          |                        |       |
| JDBCTimeout           |                        | 300   |
| PSCacheSize           | 0                      | 20    |



```

97  ↓
98  <!-- Initiate JDBC Connection Pooling - Setup/Configuration -->↓
99  <servlet>↓
100  <servlet-name>InitConnectionPool</servlet-name>↓
101  <servlet-class>com.hof.servlet.InitConnectionPool</servlet-class>↓
102  <init-param>↓
103  <param-name>Description</param-name>↓
104  <param-value>Yellowfin_Connection_Pool</param-value>↓
105  </init-param>↓
106  <init-param>↓
107  <param-name>JDBCDriverClass</param-name>↓
108  <param-value>com.mysql.jdbc.Driver</param-value>↓
109  </init-param>↓
110  <init-param>↓
111  <param-name>JDBCUrl</param-name>↓
112  <param-value>jdbc:mysql://localhost:3306/yellowfin7to71?characterEncoding=utf8</param-value>↓
113  </init-param>↓
114  <init-param>↓
115  <param-name>JDBCUser</param-name>↓
116  <param-value>yellowfin_user</param-value>↓
117  </init-param>↓
118  <!-- ↓
119  Password to the configuration database connection is encrypted at
120  installation time. If you need to change this password, you can set
121  the JDBCPasswordEncrypted parameter to false, and store the password
122  in plaintext in the JDBCPassword parameter. ↓
123  -->↓
124  <init-param>↓
125  <param-name>JDBCPassword</param-name>↓
126  <param-value>ilPoa9W1G5wNqEQe5M6uQ==</param-value>↓
127  </init-param>↓
128  <init-param>↓
129  <param-name>JDBCPasswordEncrypted</param-name>↓
130  <param-value>true</param-value>↓
131  </init-param>↓

```

リポジトリDBのJDBCドライバ

リポジトリDBに接続するためのJDBCURL

DBユーザー名

DBユーザーのパスワード

DBユーザーのパスワード暗号化：  
デフォルトはtrue（暗号化されています）

## Yellowfin

### YellowfinMISStartup<servlet>

|                             |                       |          |
|-----------------------------|-----------------------|----------|
| ReportCacheSize             |                       | 20       |
| ReportCacheMaxAge           |                       | 24       |
| BIRTPath                    | BIRT                  |          |
| ScanJarFiles                | JDBCtrue/false        | true     |
| JBCDrivers                  | JDBCScanJarFilesfalse |          |
| PdfExportInitialMemory      | (JavaFX) PDF          | (64MB)   |
| PdfExportMaximumMemory      | (JavaFX) PDFPDF       | (RAM25%) |
| TaskSchedulePollingInterval |                       | (30)     |

Yellowfin Yellowfinwebweb.xml

```

<!-- Cluster Management -->
<servlet>
  <servlet-name>ClusterManagement</servlet-name>
  <servlet-class>com.hof.mi.servlet.ClusterManagement</servlet-class>
  <init-param>
    <param-name>ServiceUser</param-name>
    <param-value>admin@yellowfin.com.au</param-value>
  </init-param>
  <init-param>
    <param-name>ServicePassword</param-name>
    <param-value>test</param-value>
  </init-param>
  <init-param>
    <param-name>ServiceAddress</param-name>
    <param-value>/services/AdministrationService</param-value>
  </init-param>
  <init-param>
    <param-name>ServicePort</param-name>
    <param-value>80</param-value>
  </init-param>
  <init-param>
    <param-name>ClusterHosts</param-name>
    <param-value>
      192.168.4.196
    </param-value>
  </init-param>
  <load-on-startup>11</load-on-startup>
</servlet>

```

- 1.
- 2.
3. Yellowfin

CPUYellowfin

## Web

Tomcat100

\$INSTALL\_DIRECTORY\appserver\webapps\ROOT\WEB-INF\web.xml

**InitConnectionPool**

## Yellowfin

YellowfinYellowfin

\$INSTALL\_DIRECTORY\appserver\webapps\ROOT\WEB-INF\web.xml

25

Yellowfin

## JavaJVM


YellowfinYellowfin

YellowfinJVM


## Windows

Yellowfin\Yellowfin\appserver\bin\service.bat

1. Yellowfin\appserver\bin
2. tomcat8w.exe //ES//Yellowfin

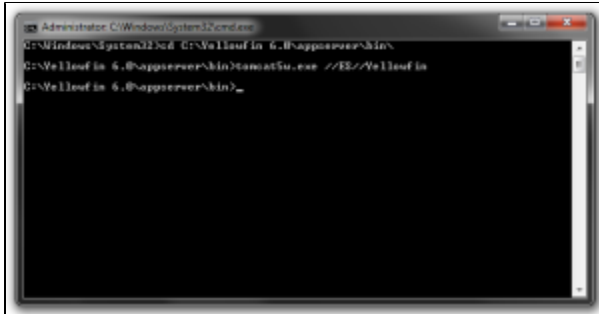

Yellowfin\Java

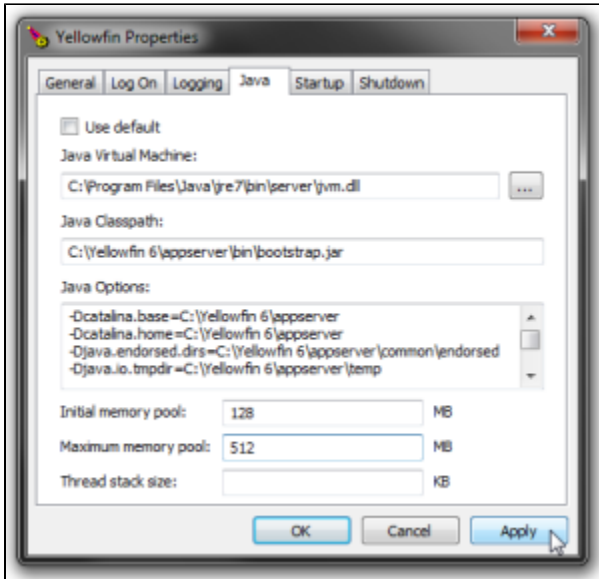

3. Yellowfin

## Windows

Windows\Yellowfin

1. Yellowfin
2. Yellowfin\appserver\bin\catalina.bat
- 3.

```
rem Memory limits.
rem Use these options to set the Java memory limits.
rem -Xms128m sets the initial Java heap size to 128Mb
rem -Xmx512m sets the maximum Java heap size to 512Mb
rem To set memory limits uncomment the following line:
rem set JAVA_OPTS=%JAVA_OPTS% -Xms128m -Xmx512m
```

4. remXmx
5. Yellowfin

## Linux/Unix/Mac OSX

Yellowfin\Linux/Unix/Mac OSX

1. Yellowfin
2. Yellowfin\appserver\bin\catalina.sh
- 3.

```
# Memory limits.  
# Use these options to set the Java memory limits.  
# -Xms64m sets the initial Java heap size to 64Mb  
# -Xmx256m sets the maximum Java heap size to 256Mb  
#JAVA_OPTS="$JAVA_OPTS -Xms64m -Xmx256m"
```

4. **Xmx**
5. Yellowfin